


MEDITERRANEA SIENA MATT 600x600

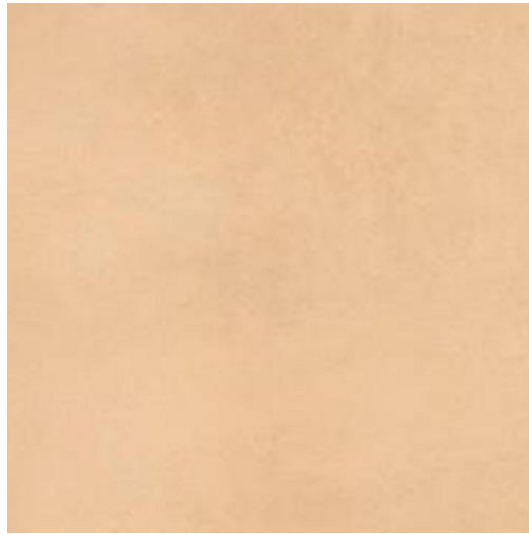

Class 1 Building Product Information Requirements Self-Assessment

Product Name: MEDITERRANEA SIENA MATT 600x600

Product Identifier: MEDSIM60

Product Description: A glazed porcelain tile with an R10 matt finish and a water absorption rate of less than 0.50%.

Building Code Obligations

Code Clauses:

B2 – Durability

B2.3.1

C3 – Fire affecting areas beyond the source

D1 – Access routes

D1.3.3

E3 – Internal moisture

E3.3.2, 3.3.3, 3.3.4

G3 – Food preparation and prevention of contamination

G3.3.2

G6 – Airborne and Impact sound

G6.3.1



BPIR COMPLIANT



Scope	Use
B2 Durability	See below Suitability table.
C3 Fire	The Building Code relating to fire ratings regulation and standards become mandatory from April 2013, establishing the list of products belonging to Classes A 'No Contribution to Fire' provided for in Decision 94/611/EC implementing Article 20 of Council Directive 89/106/EEC.
D1 Access Routes	Acceptable for use under D1/AS1
E3 Internal Moisture	Under E3 Tiles installed over a waterproof membrane using a nonporous Grouting system, are an acceptable solution.
G3 Food Preparation and Prevention from Contamination	As an Impervious and easy to clean Surface this range complies
G6 Airborne and Impact Sound	If required Tiles can form part of an acoustic system to comply with IIC and STC in conjunction with an approved third-party system.

Suitability	Residential	Light Commercial	Commercial	Industrial
Indoor Floor	✓	✓	-	-
Indoor Walls	✓	✓	✓	✓
Outdoor Floor	✓	✓	✓	✓
Outdoor Cladding	✓	✓	✓	✓
Frost Resistant	✓	✓	✓	✓
Swimming Pool Submerged	✓	✓	✓	✓
Swimming Pool Surround	✓	✓	✓	✓
Paving	-	-	-	-
Over Underfloor Heating	✓	✓	✓	✓
Commercial Kitchen Wall	✓	✓	✓	✓
Within 1.5m of a Plumbing Fixture or Fitting	✓	✓	✓	✓

Note – this building product is not subject to a warning or ban under section 26 of the Building Act 2004

Specifications	
CODE	MEDSIM60
TILE SIZE (mm)	600x600
THICKNESS (mm)	9
SUITABILITY	Floor/Wall
FINISH	Matt
CLASS	PEI Class 3: Light to moderate traffic. Countertops, walls and floors for normal foot traffic.
RECTIFIED	Yes
WEIGHT (kg)	8.00
COEFFICIENT OF FRICTION	0.42
SLIP RATING	R10
TILES PER BOX	4
M2 PER BOX	1.44
PATTERNS/FACES	7
COUNTRY OF ORIGIN	Spain

Building Code Clause and Contribution

B2 - Durability

Compliance with B2 Durability is about providing evidence that the product will meet the relevant durability life in the context of the environment in which it will be located.

The building code sets out the framework for establishing the relevant durability life of building elements based on a number of criteria. B2/AS1 provides a decision tree to establish the relevant durability for common building materials in different circumstances.

Having determined the durability life of the product, the next step is to determine if the product, when exposed to the environment, will continue to perform for the relevant period. A key tool which a product supplier can consider in claiming compliance is limiting the environment in which the product will be exposed to (e.g. a ferrous material used in an indoor environment will last longer than it would when exposed to salt spray — in this example it would be appropriate for the supplier to condition the compliance information to use only in indoor environments).

C3 – Fire affecting areas beyond the source.

C3 Fire affecting areas beyond the fire source is primarily about ensuring that fire does not spread from a fire in the building (in both vertically and horizontally) and from an adjacent building.

The prime product attribute used is the fire resistance rating (FRR) methodology. In most cases a product is combined with other products to achieve a FRR (e.g. an external wall fire rating may be formed by the combination of the external cladding, thermal insulation and the internal lining).

C/AS1 and C/AS2 set out performance criteria for buildings and in particular the FRR requirements for various types of buildings and parts of buildings. Appendix C of C/AS2 sets out test methods for the building elements involved in spread of fire. Appendix B of C/AS2 sets out performance criteria for sprinkler systems while Appendix A sets out criteria for fire safety systems such as alarms and hydrants.

D1 – Access routes

For D1 access routes, in most cases product-related compliance for access routes are slip resistance for floors and the shapes/locations etc of handrails. The Acceptable Solution for access D1/AS1 and NZS 4121:2001 provide good information on compliance for products on access routes.

E3 – Internal Moisture

E3 Internal Moisture is about ensuring that moisture created within the building does not lead to mould or create damage to adjacent buildings or structural elements in the building in which it is installed. Prevention of the creation of mould is a combination of temperature, insulation and ventilation. Prevention of water damaging other building elements is mainly about installation details (i.e. sealing joints) as well as impervious products. E3/AS1 provides some useful design details, albeit without much product material information.

G3 – Food preparation and prevention of contamination

G3 Food preparation and prevention from contamination for a product (such as a kitchen bench) is mainly associated with being easily cleaned and impervious.

G3/AS1 provides some general design details for food preparation areas but has no referenced product standards, although the document does state some acceptable materials used for surfaces. Compliance with G3/AS1 is not mandatory but provides a good benchmark for compliance.

G6 – Airborne and Impact Sound

For a product, G6 Airborne and impact sound is generally about systems which are designed to work together to achieve the necessary sound attenuation.

The code itself at G6.3.2 sets a quantifiable performance level: “The Sound Transmission Class of walls, floors and ceilings, shall be no less than 55” and G6.3.2 sets the impact insulation class of floors shall be no less than 55. The Acceptable Solution G6/AS1 sets out the transmission and impact insulation class of common wall systems. G6/VM1 sets out test methodologies where the details do not match those of G6/AS1.

Manufacturer Details:

Tile Warehouse Approved



Importer Details:

Tile Warehouse Limited

Address: 286 Church Street, Onehunga, AKL 1061

NZBN: 9429041069448

Website: www.tilewarehouse.co.nz

Technical Data Sheet

BÁSIC CHARACTERISTICS:		
Series name:	MEDITERRANEA	
Material name:	MEDITERRANEA SIENA PW R	
Nominal dimension, N:	600 mm x 600 mm 9.0 mm	
Production unit, W:	59.8 cm x 59.8 cm	
Colour:	SIENA	
Family:	BASE RELIEVE	
Finish:	MATE	
Water absorption group:	Bla	
Nature of the surface:	ESMALTADO, GL	
Surface treatment applied after baking:	RECTIFICADO	
Aesthetic classification and shading:		
Number of different faces:		
		
DIMENSIONS AND SURFACE APPEARANCE:		
Determination of dimensional characteristics and surface quality:	Cumple	UNE EN ISO 10545-2
PHYSICAL PROPERTIES:		
Water absorption:	Ev < 0.5% (Grupo/Group Bla)	UNE EN ISO 10545-3
Breaking strength:	>=1300 N/mm ²	UNE EN ISO 10545-4 Fuerza de rotura
Bending strength:	>=35 N	UNE EN ISO 10545-4 Resistencia a la flexión
Deep abrasion resistance:		UNE EN ISO 10545-6
Surface abrasion resistance:	3	UNE EN ISO 10545-7
Coefficient of linear thermal expansion:	<9x10 ⁻⁶ /(-6)°C ⁻¹	UNE EN ISO 10545-8
Thermal shock resistance:	Cumple	UNE EN ISO 10545-9
Crazing resistance:	Cumple	UNE EN ISO 10545-11
Frost resistance:	Cumple	UNE EN ISO 10545-12
Slip resistance:	R10	UNE EN 16165 Anexo A(DIN 51130 Apdo. 5 Rampa pie calzado)
	C	UNE EN 16165 Anexo B(DIN 51097 Rampa pie descalzo)
	C2	UNE EN 16165 Anexo C(UNE 41901:2017 EX)
	>0.36	UNE EN 16165 Anexo C(BS 7976-2: Pendulum testers)
	>0.42	ANSI A137.1 Section 9.6.1, DCOF
Fire performance:	A1 - A1 FL	-
Adhesión: Adhesivo cementoso	Tipo C2 > 1N/mm ²	EN 12004 + A1
CHEMICAL PROPERTIES:		
Stain resistance:	4	UNE EN ISO 10545-14
Chemical resistance:	LA/HA	UNE EN ISO 10545-13 Ácidos y bases
	A	UNE EN ISO 10545-13 Productos de limpieza
CE MARKING:		SYSTEM CERTIFICATIONS
 A3RDP13		  Design, development and manufacture of ceramic flooring and tiling.
IMPORTANT NOTES:		
<p>Before installing the product, check its tone, calibre and quality. No claims will be accepted after the material has been installed. Protecting the product during installation and cleaning it correctly after pointing and construction work play a part in the correct installation process. For more information on installation and pointing, visit the UNDEFASA, S.A. website: www.undefasa.com. The packing list for this piece is shown in the UNDEFASA, S.A. catalogue. The indicated weight is approximate and may vary by up to 5%, depending on the model. In the case of a product with a relief, this variation could be greater. This document is purely for commercial information purposes. It may not be used as a legal or administrative argument without the express authorisation of UNDEFASA, S.A. The colour and finish shown in this technical data sheet's image are merely illustrative and may differ from the finish of the real piece. To ensure correct tiling using ceramic tiles, we recommend consulting the Spanish UNE 138002 Standard.</p>		

FIRE PERFORMANCE

BE 100% CONFIDENT IN THE PRODUCTS YOU SPECIFY



“ The Grenfell Tower tragedy in London highlights the importance to specifiers of ensuring the products they specify (from flooring to cladding materials) are fire-resistant in order to conform to the building code relating to fire rating regulations. ”

TILES DO NOT REQUIRE TESTING AS THEY DO NOT CONTRIBUTE TO FIRE

In New Zealand, fire ratings are required by the Building Code to ensure that if a building is on fire, its construction materials do not significantly increase the spread or intensity of a fire. Tiles, being non-combustible, do not require testing as they do not contribute to fire. Aside from this, tiles by nature do not contain any form of petroleum-based product or wood fibres and are in essence, fire-proof and non toxic!

The building code relating to fire rating regulations and standards became mandatory from April 2013, establishing the list of products belonging to Classes A 'No contribution to fire' provided for in Decision 94/611/EC implementing Article 20 of Council Directive 89/106/EEC.

WHAT YOU NEED TO KNOW:

- Because most ceramics are manufactured at over 1000 degrees celsius, they become fire-resistant and therefore an obvious choice for both commercial and residential floor and wall surfaces. For example, if a lighted cigarette is dropped on the floor, it will not do any damage to the tile. Even hot kitchen pans or skillets will not scorch or melt the surface of tile, let alone set the tile on fire.
- Tiles are non-combustible so do not catch fire, nor do they give off toxic fumes in the form of VOC's (Volatile Organic Compounds) affecting breathing, when exposed to fire.
- During the manufacture of tiles, any VOC's that may have been present in clays or binders are completely burned away which ensures the final product is inert.



A safe and simple approach with regards to Fire performance in products is to utilise tile for both **Floor** and **Wall** areas. To view latest styles and designs to suit Commercial Projects, see our tile and stone range; <https://www.tilewarehouse.co.nz/tile-stone-range/>